

# 265XP- 265IP PRECISION SERIES

## TWO YARD COMPACTOR REPLACEMENT HEADS



**Keep your equipment up and running and lower your costs with Precision Series compactor heads from Go To Parts.**

- Factory built and tested
- 1 year standard warranty

Patent Number 9,358,745

### IDEAL FOR:

Supermarkets



Malls



Hospitals



Restaurants



Office Buildings



Retail Establishments





# 265XP CROSS CYLINDER HEAD


Breaker bar is engineered for increased strength and is designed for additional structural support.

Ram is suspended above chamber floor and glides on near frictionless UHMW guides.

Large 40" X 60" clear top opening is WASTEC rated at 1.48 cubic yards


7" penetration into the container reduces spring-back of material into charge chamber

UHMW guides are long lasting and can be easily replaced

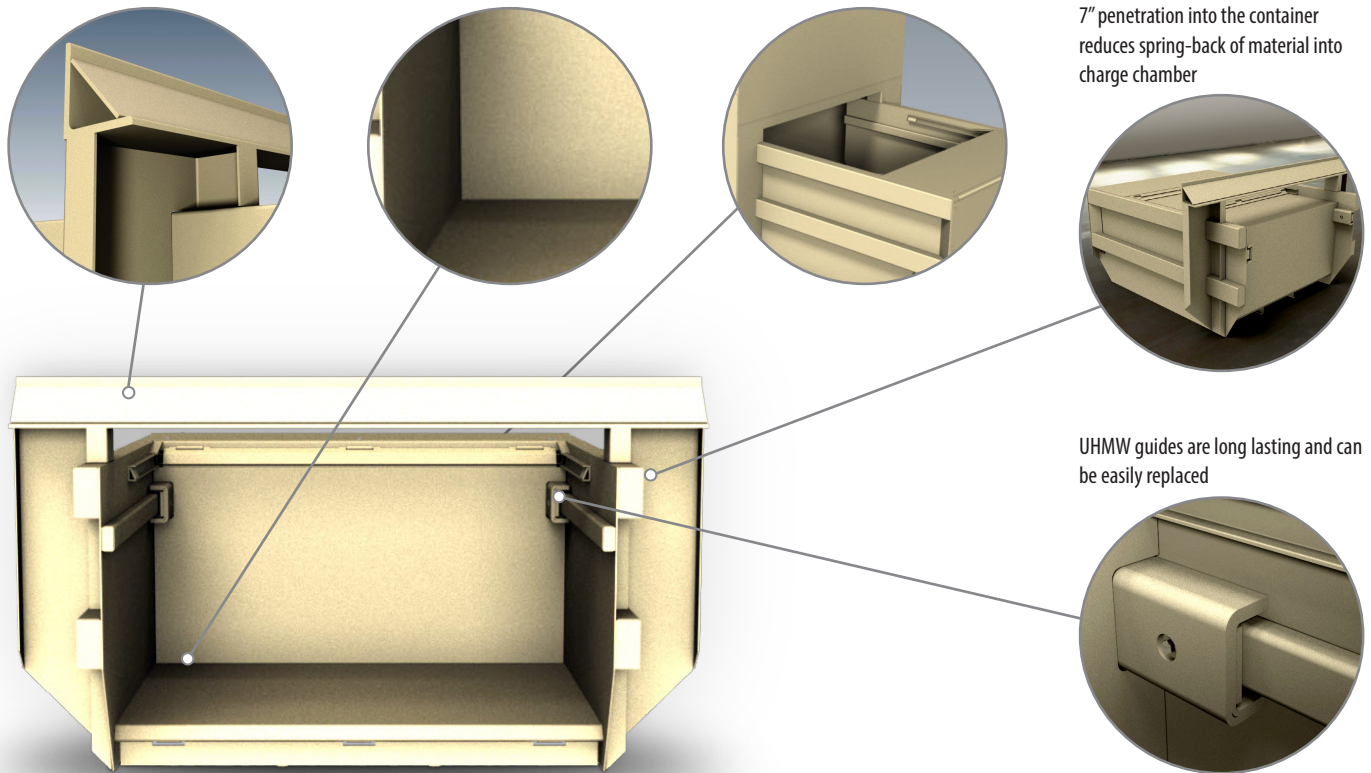

## LARGEST MAINTENANCE ACCESS IN THE INDUSTRY

- ▶ Large 49" X 18" access opening
- ▶ Hydraulic hoses are easy to inspect /replace
- ▶ Clean out area designed to drain excessive liquid
- ▶ Up to 33% less time to change cylinders

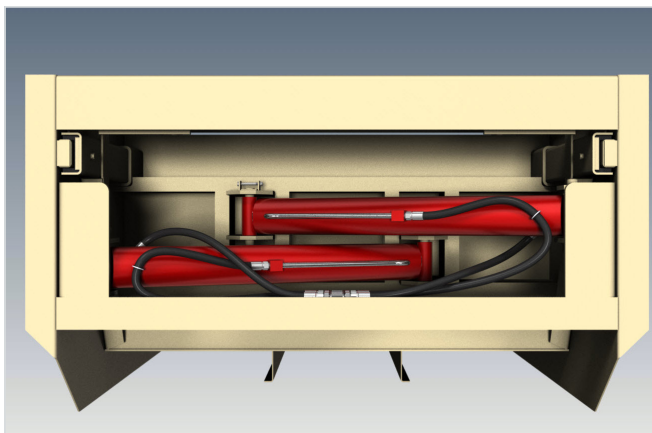

## SPECIFICATIONS

### Charge Box

- Wastequip rating: 2.00 cubic yards
- Wastec rating: 1.36 cubic yards
- Clear top opening: 34" Length x 60" Width

### Ram

- 1/4" steel construction with engineered structural reinforcements and precision guided ram system

### Compactor Head

- Floor: 3/8" with two 5" structural supports
- Sides: 3/16" side plates with 6" x 3" formed steel stiffener
- Top rail: 6" x 3" formed steel stiffener
- Breaker bar: 6" x 6" x 1/2" angle steel
- Sump: 12" height
- 

### Hydraulic Specifications

- Ram penetration: 7"
- Hydraulic cylinder: (2), cylinder bore: 4"
- Cylinder rod: 2.5"
- Quick Disconnects: 3/4" Female, 1/2" Female

# 265IP SINGLE CYLINDER HEAD


Hydraulic quick disconnects are easy to access

Ram is suspended above chamber floor and glides on near frictionless UHMW guides

Breaker bar is engineered for increased strength and is designed for additional structural support


6" penetration into the container reduces spring-back of material into charge chamber

UHMW guides are long lasting and can be easily replaced

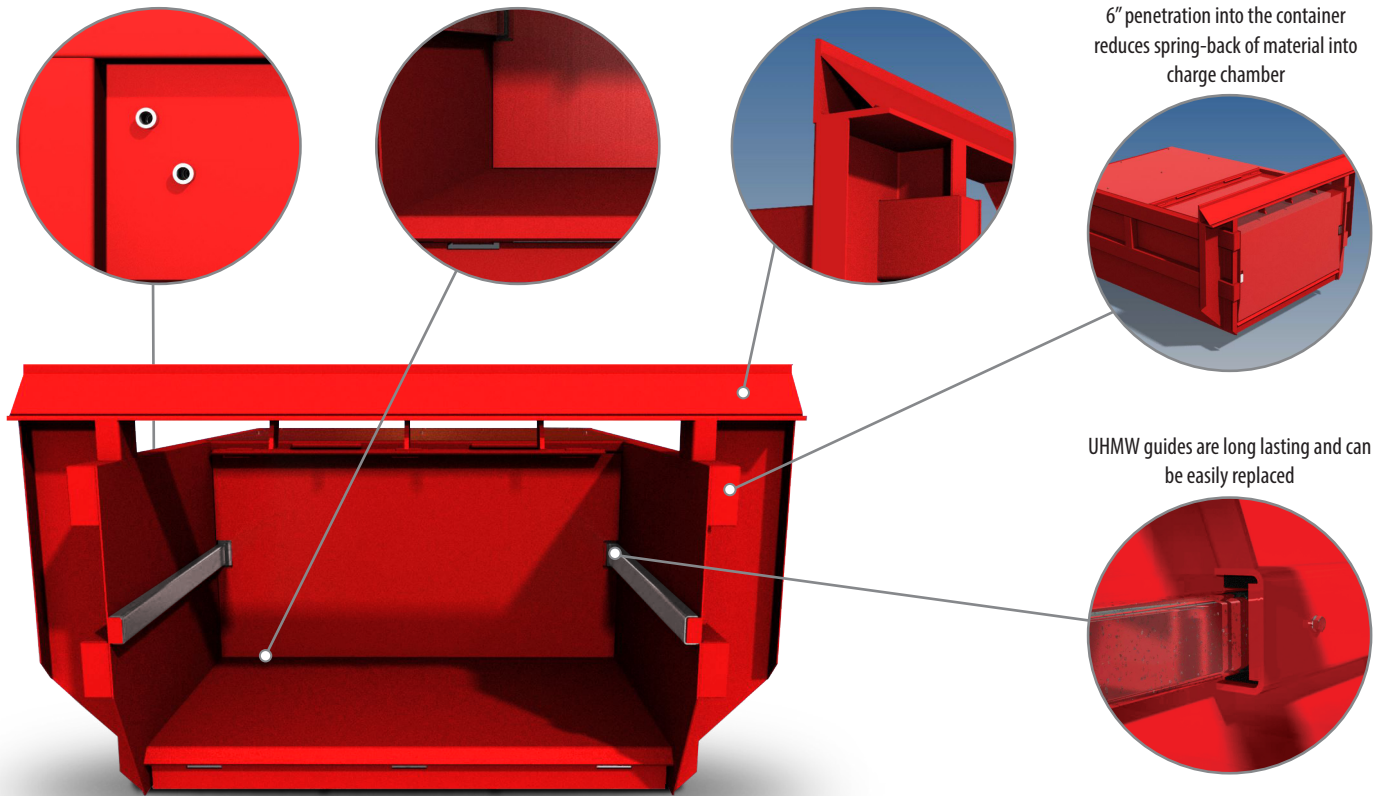

## LARGE MAINTENANCE ACCESS

- ▶ Hydraulic hoses are easy to inspect /replace
- ▶ Clean-out area designed to drain excessive liquid
- ▶ Up to 33% less time required to change cylinder
- ▶ Plenty of room to clean behind ram if necessary

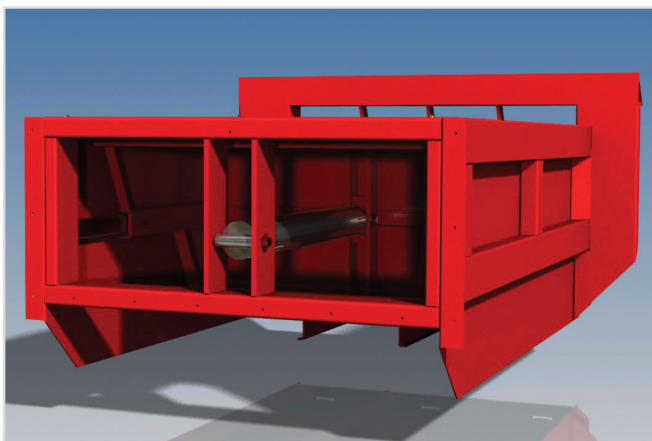

## SPECIFICATIONS

### Charge Box

- Wastequip rating: 2.00 cubic yards
- Wastec rating: 1.36 cubic yards
- Clear top opening: 34" Length x 60" Width

### Ram

- 1/4" steel construction with engineered structural reinforcements and precision guided ram system

### Compactor Head

- Floor: 3/8" with two 5" structural supports
- Sides: 3/16" side plates with 6" x 3" formed steel stiffener
- Top rail: 6" x 3" formed steel stiffener
- Breaker bar: 6" x 6" x 1/2" angle steel
- Sump: 12" height

### Hydraulic Specifications

- Ram penetration: 6"
- Hydraulic cylinder: (1), cylinder bore: 5"
- Cylinder rod: 2.5"
- Quick Disconnects: 1/2" Female, 3/8" Female

# 265XP PRECISION SERIES COMPACTOR

**CROSS CYLINDER**

84" OVERALL WIDTH  
66 5/8" HEAD  
37 15/16" HEAD  
48"  
12"  
12"

67 1/4"  
ROLLER SUPPORT TUBES BOTH SIDES  
CLEAR TOP OPENING: 60" W X 40" L

PART NUMBER	DESCRIPTION
249077	265XP REPLACEMENT HEAD

# 265IP PRECISION SERIES COMPACTOR

**SINGLE CYLINDER**

84" OVERALL WIDTH  
66 5/8" HEAD  
37 15/16" HEAD  
48"  
12"  
12"

87 3/4"  
ROLLER SUPPORT TUBES BOTH SIDES  
CLEAR TOP OPENING: 60" W X 34" L

PART NUMBER	DESCRIPTION
249078	265IP REPLACEMENT HEAD

ANSI required decals for compactor head are included.



Replacement parts available at  
[www.gotoparts.com](http://www.gotoparts.com)  
844-468-6727