# STATIONARY COMPACTORS

345IP Precision Series 3-Yard Model

With our very own Guardian™ Control System and precision-guided ram, Wastequip's stationary compactors are ideal for handling dry waste.





Easy-to-use 24-volt Guardian Control System (optional remote pendant shown)

## **Guardian™ Control System**

- New user-friendly controls
- · Automatic Maintenance Tracking
- · Superior 24-volt control
- · NEMA 4 rated enclosure
- Remote power unit with weather protection cover

## **Heavy-Duty Ratchet Binders**

- 1-1/4" thick hooks
- Greasable fittings

### **Precision-Guided Ram**

- Glides smoothly above compactor floor on long-lasting UHMW guides
- 14" ram penetration minimizes spring-back of material

### Large-Access Openings for Maintenance and Service

- · Removable rear panel
- · Removable side panels





Heavy-duty ratchet binders with 1-1/4" thick hooks are standard.

<sup>\*</sup> Use of an oil heater or extreme cold weather hydraulic oil is recommended in extreme cold conditions.

# **STATIONARY COMPACTORS**

### 345IP Precision Series 3-Yard Model

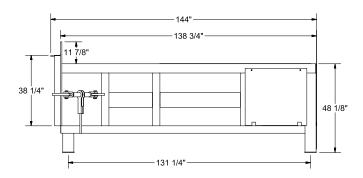

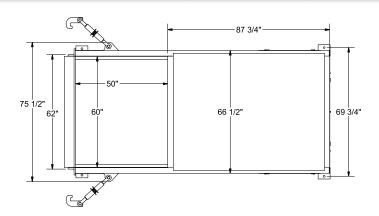

#### **Standard Features**

- Heavy-duty ratchet binders with 1-1/4" hooks
- 58-second cycle time
- · Controls in panel face
- · Automatic Maintenance Tracking
- Full container light
- · Low temperature oil
- · Multi-cycle timer
- NEMA 4 control panel protects against windblown dust, splashing water, and hose-directed water
- · Operation and service manual
- Primed and painted in multiple colors
- Remote power unit with weather cover

#### **Optional Features**

- · Advance warning light
- · Color-coded pressure gauge
- · Guide rails with stops
- · Oil heater
- · Photo electric eye
- · Odor control system
- Cart dumper

#### Warranty

 3-1-1 warranty (3-year structural, 1-year parts, 1-year labor)



Replacement parts available online at www.wastebuilt.com.

### **Specifications**

Specifications		
Charge Box	Wastequip rating Wastec rating Clear top opening Compactor weight with power unit	3.00 cu. yds. 2.00 cu. yds. 50" length x 60" width 5,500 lbs.
Ram	Ram height Ram penetration Face plate Base plate Top plate Side plates	30-1/2" 14" 1/2" steel with 3/4" stiffener plates 3/8" steel plate with 10 ga. formed stiffeners 1/4" steel plate with 10 ga. formed stiffeners 1/4" formed plate
Compactor Head	Floor Sides Breaker bar Top deck	3/8" steel plate with channels at 12" spacing 1/4" steel plate sheets with 4" x 3" vertical stiffeners 6" x 8" x 3/4" angled steel 12 gauge steel (standard)
Electrical	Electric motor, fan cooled Voltage Power box Automated cycle operation	10 hp 208/230/460, 3 phase 60 Hz UL rated, TEFC housing Push-button-start extends, retracts, and stops automatically
Hydraulic Performance	Pump Pump type Hydraulic oil tank Cylinder bore/rod/stroke Normal ram face pressure Maximum ram face pressure Normal ram psi Maximum ram psi Cubic yard per hour Power unit location Cycle time	14.1 gpm Fixed gear 25 gallon reservoir 6" bore, 2.5" rod, 65" stroke 48,000 lbs at 1,700 psi 56,500 lbs at 2,000 psi 26.23 psi 30.87 psi 105 Remote 58 seconds

#### IPE model includes 1/2" compactor head floor

#### **Standard Color Choices**





























Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an additional charge.



Tel: 877.468.9278 | sales@wastequip.com | www.wastequip.com