
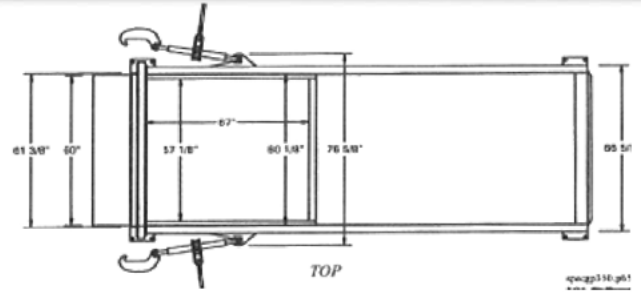


STATIONARY COMPACTORS

350, 350HD and 350HDT

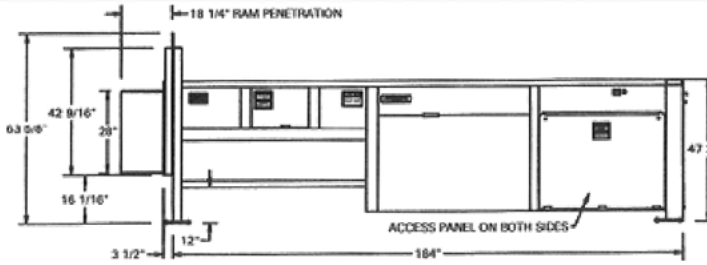

STANDARD Features

- 1/2" AR Plate ram floor
- 51-second cycle time
- Heavy-duty breaker bar is 5" x 3" x 3/8" angled steel
- Full container light
- Low temperature oil
- Multi-cycle timer
- Operational / service manual
- NEMA 4 control panel protects against windblown dust, splashing water, and hose directed water
- Primed and painted in several colors

Optional Features

- Advance warning light
- Pressure gauge - color coded
- Guide rails
- Oil heater
- Photo electric eye
- Odor control system
- Cart dumper
- Biodegradable oil
- Steel / Chutes / Hoppers



Replacement parts available online at www.gotoparts.com.

Specifications

		350	350HD	350HDT
Charge Box	Wastequip rating	3.5 cu. yds.		
	Wastec rating	2.54 cu. yds.		
	Clear top opening	67"L x 57"W		
	Compactor weight with power unit	6,400 lbs.	7,900 lbs.	8,490 lbs.
Ram	Ram height	28"		
	Ram penetration	18"		
	Face plate	1/2"	3/4"	
	Base plate	1/4"	3/8"	
	Top plate	1/4"	3/8"	
	Side plates	1/4"	3/8"	
Compactor Head	Floor	1/2" AR plate		3/4" AR plate
	Sides	1/4" plate	3/8" plate	
	Breaker bar	5" x 3" x 3" x 8" structural steel with 6" x 4" x 1/2" tube stiffener		
	Top deck	12 gauge		
Electrical	Electric motor, fan cooled	15 hp		
	Voltage	208/230/460, 3 phase		
	Power box	UL rated, TEFC housing		
	Automated cycle operation	Turn-key switch, ram extends, retracts, and stops automatically		
Hydraulic Performance	Pump	13.0 gpm		
	Pump type	Regen		
	Hydraulic oil tank	39 gallon reservoir		
	Cylinder bore/rod/stroke	6" bore, 4.5" rod, 90" stroke		(2) 6" bore, 4.5" rod, 90" stroke
	Normal ram face pressure	55,100 lbs.	75,000 lbs.	
	Maximum ram face pressure	63,600 lbs.	86,500 lbs.	
	Normal ram psi	32.80 psi	44.60 psi	
	Maximum ram psi	37.90 psi	51.50 psi	
	Cubic yard per hour	180	132	90
Power unit location	External w/weather cover			
Cycle time	51 seconds	69.2 seconds	101.7 seconds	

Standard Color Choices*



Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an



Tel: 877.468.9278 | sales@wastequip.com | www.wastequip.com

Wastequip is the leading North American manufacturer of waste and recycling equipment for collecting, processing and transporting recyclables and solid or liquid waste. December 2016 © Wastequip, all rights reserved. Specifications subject to improvement without notice. Equipment displayed should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in the literature are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Wastequip. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.